




Atlanta, Georgia

Phone 800-521-7326

Fax 770-745-1333

Drop In Anchors Stainless Steel

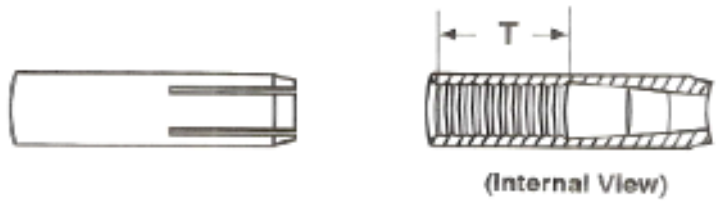

Drop In Anchors are a two piece, internally threaded expansion anchor. The anchor is for flush mounting, medium to heavy duty applications in solid base materials such as stone or concrete.

304 SS Part	316 SS Part	Anchor Size Bolt Size	Hole Diameter	Minimum Embedment	Allowable Load Capacity	
					4000 PSI Concrete	
					Tension (lbs.)	Shear (lbs.)
6325SS	6325-316SS	1/4-20	3/8	1"	327	506
6337SS	6337-316SS	3/8-16	1/2	1-1/2	905	1189
6350SS	6350-316SS	1/2-13	5/8	2"	1696	1537
6362SS	6362-316SS	5/8-11	7/8	2-1/2	1810	3216
6375SS	6375-316SS	3/4-10	1"	3-1/8	1456	4374

Allowable load capacities listed are calculated using an applied safety factor of 4.

Peco Fasteners specification sheets are a reference guide to help in the selection of fasteners. Peco has made every effort to ensure the accuracy of the information. However, Peco Fasteners is not responsible for any errors that may be contained within these sheets. Peco Fasteners makes no claim of warranty in the accuracy of this information. Users of this information are solely responsible for protecting themselves against liability. It is solely the responsibility of the purchasers and users of these fasteners to consult with Engineers that are experts in an applicable field. Peco Fasteners is not responsible for any loss, claim, or damage due to these specification sheets.