




Atlanta, Georgia

Phone 800-521-7326

Fax 770-745-1333

Super Yellow Plastic Anchor

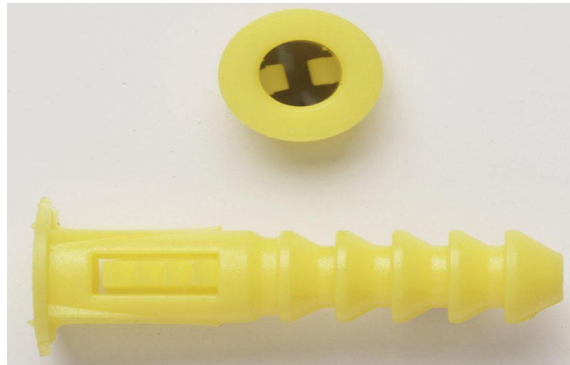

Plastic anchors are designed for use with lightweight fixtures. It can be used in concrete, block, brick, & wallboard. Holding values in wallboard tend to be inconsistent. Plastic anchors are injection molded from high quality polypropylene and designed to be used in conjunction with a sheet metal screw.

Screw Size	Length Of Anchor	Flange Diameter	Drill Bit Size	Minimum Embedment Depth
8-10	1"	3/16	3/16	1"
10-12	1-1/4	1/4	1/4	1-1/4
14-16	1-1/2	5/16	5/16	1-1/2

Peco Fasteners specification sheets are a reference guide to help in the selection of fasteners. Peco has made every effort to ensure the accuracy of the information. However, Peco Fasteners is not responsible for any errors that may be contained within these sheets. Peco Fasteners makes no claim of warranty in the accuracy of this information. Users of this information are solely responsible for protecting themselves against liability. It is solely the responsibility of the purchasers and users of these fasteners to consult with Engineers that are experts in an applicable field. Peco Fasteners is not responsible for any loss, claim, or damage due to these specification sheets.