



Battery Specification Sheet

DRY0070

Technical Specifications


Industry Size:	AA
ANSI/NEDA #:	15AC
IEC #:	LR6
Nominal Voltage	1.5 V
Nominal Capacity	2650 mAh
<i>(10Ω load to 0.9v @ 20 °C)</i>	
Chemistry	Alkaline (Zinc Manganese Dioxide)

Physical Specifications

Height:	50.2 mm	1.98 in.
Diameter:	14.2 mm	0.56 in.
Weight	24.0 g	0.85 oz.
Terminal Type	Button Positive/Flat Negative	


Capacity Specifications

Initial		
Off-Load Voltage	1.58V	
On-Load Voltage	1.55V	
Short Circuit Current:	10.0A	
After 12 Months Storage		
Off-Load Voltage	1.55V	
On-Load Voltage	1.51V	
Short Circuit Current:	8.0A	
Shelf Life:	7 years at 20°C (68°F)	

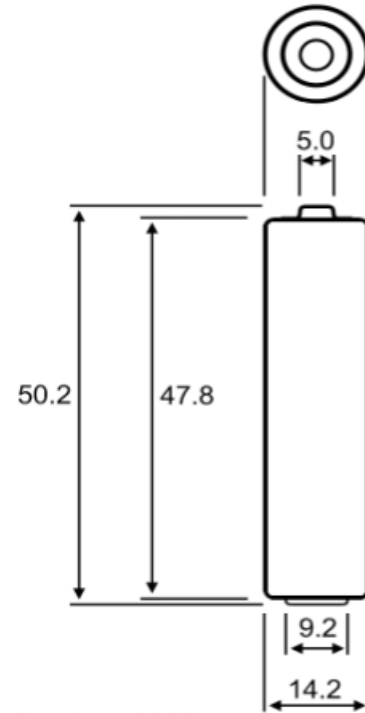

Due to changes in the manufacturing processes, specifications are subject to change without notice

10Ω Continuous Discharge

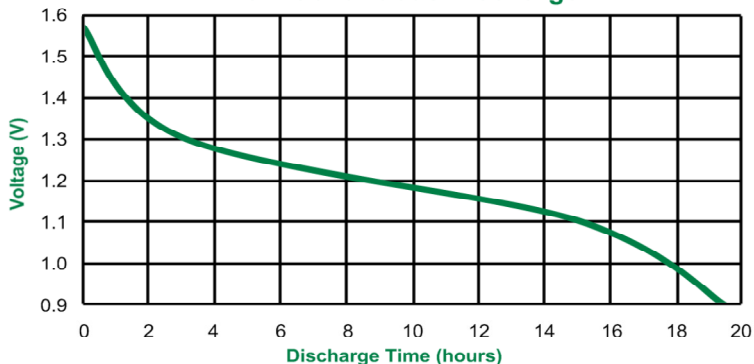

This battery is not designed to be recharged. Recharging presents a risk of electrolyte leakage, explosion and damage to device. Install battery with + and - in correct position. Avoid using old and new batteries together. Short circuits, heating, disposal in fire and disassembly are prohibited.